




Strain Wave Gear KB-HO Series Box Unit Hollow shaft open Flexspline

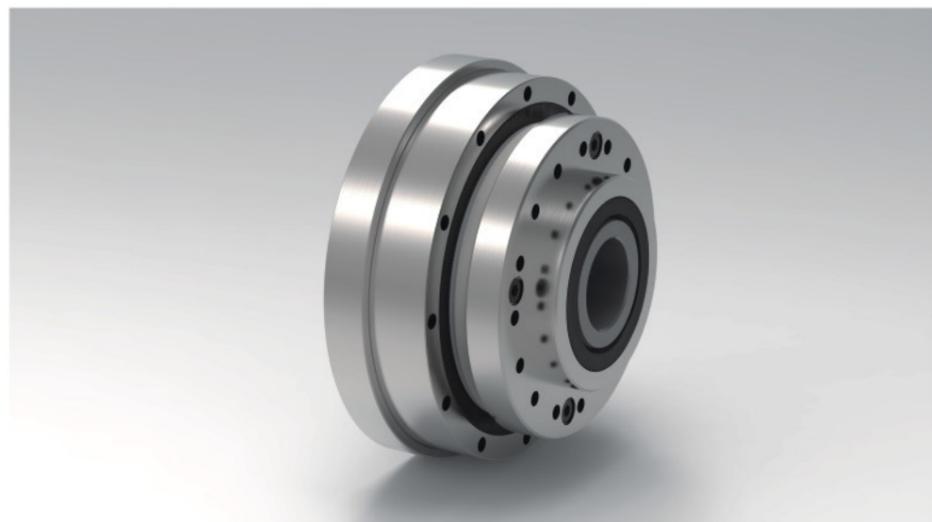

Ordering Code

Gear Series	Transmission Type	Gear Size	Ratios				Special Design	
KB	HO	14	50	80	100		as per customers' special requirements	
		17	50	80	100	120		
		20	50	80	100	120		160
		25	50	80	100	120		160
		32	50	80	100	120		160
		40	50	80	100	120		160
		45	50	80	100	120		160
Ordering Code								
KB-HO		-	25	-	100	-	SP	

Technical Specifications

Series	Size	Ratio	Max Output Torque	Average Output Torque	Rated Output Torque at rated speed 2000 rpm	Emergency Stop Torque	Max Input Speed	Average Input Speed	Moment of Inertia	Weight
			Nm	Nm	Nm	Nm	rpm	rpm	kgm ²	kg
KB-HO	14	50	18	11	7,8	47	8500	3500	0.091x10 ⁻⁴	0.71
		80	23	6,9	5,4	35				
		100	28	11	7,8	54				
	17	50	34	26	16	70	7300	3500	0.193x10 ⁻⁴	1.00
		80	43	27	22	87				
		100	54	39	24	110				
		120	54	39	24	86				
	20	50	56	34	25	98	6500	3500	0.404x10 ⁻⁴	1.38
		80	74	47	34	127				
		100	82	49	40	147				
		120	87	49	40	147				
	25	50	98	55	39	186	5600	3500	1.07x10 ⁻⁴	2.1
80		137	87	63	255					
100		157	108	67	284					
120		167	108	67	304					
32	50	216	108	76	382	4800	3500	2.85x10 ⁻⁴	4.5	
	80	304	167	118	568					
	100	333	216	137	647					
	120	353	216	137	686					
	160	372	216	137	686					
40	50	402	196	137	686	4000	3000	9.28x10 ⁻⁴	7.7	
	80	519	284	206	980					
	100	568	372	265	1080					
	120	617	451	294	1180					
45	50	502	265	176	950	4500	2500	13.8x10 ⁻⁴	10.1	
	80	706	395	315	1280					
	100	760	505	355	1580					
	120	822	622	405	1880					
	160	883	633	405	1890					
50	80	941	521	372	1860	4500	2500	57.2x10 ⁻⁴	14.5	
	100	982	656	471	2050					
	120	1090	815	533	2055					
		160	1190	843	534	2250				

Advantages


- High positioning and rotational accuracy
- High repeatability accuracy
- High torque
- Super compact design
- Backlash free
- Long service life
- High torsional stiffness
- High efficiency
- Simple installation
- Flexible for application design

Main Applications

- Robots
- High Precision Tooling Machine
- High Precision Testing Equipment
- Medical Equipment
- Optical Equipment
- Analytical and Testing Equipment
- Semiconductor Manufacturing Systems
- Packing Machines



Strain Wave Gear KB-HO Series Box Unit Hollow shaft open Flexspline

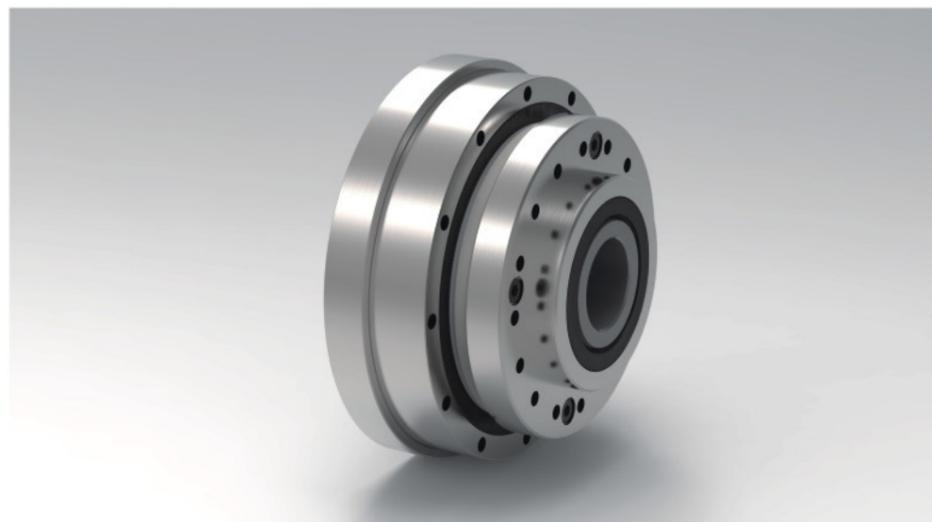

Ordering Code

Gear Series	Transmission Type	Gear Size	Ratios				Special Design	
KB	HO	14	50	80	100		as per customers' special requirements	
		17	50	80	100	120		
		20	50	80	100	120		160
		25	50	80	100	120		160
		32	50	80	100	120		160
		40	50	80	100	120		160
		45	50	80	100	120		160
Ordering Code								
KB-HO		-	25	-	100	-	SP	

Technical Specifications

Series	Size	Ratio	Max Output Torque	Average Output Torque	Rated Output Torque at rated speed 2000 rpm	Emergency Stop Torque	Max Input Speed	Average Input Speed	Moment of Inertia	Weight
			Nm	Nm	Nm	Nm	rpm	rpm	kgm ²	kg
KB-HO	14	50	18	11	7,8	47	8500	3500	0.091x10 ⁻⁴	0.71
		80	23	6,9	5,4	35				
		100	28	11	7,8	54				
	17	50	34	26	16	70	7300	3500	0.193x10 ⁻⁴	1.00
		80	43	27	22	87				
		100	54	39	24	110				
		120	54	39	24	86				
	20	50	56	34	25	98	6500	3500	0.404x10 ⁻⁴	1.38
		80	74	47	34	127				
		100	82	49	40	147				
		120	87	49	40	147				
	25	50	98	55	39	186	5600	3500	1.07x10 ⁻⁴	2.1
80		137	87	63	255					
100		157	108	67	284					
120		167	108	67	304					
32	50	216	108	76	382	4800	3500	2.85x10 ⁻⁴	4.5	
	80	304	167	118	568					
	100	333	216	137	647					
	120	353	216	137	686					
	160	372	216	137	686					
40	50	402	196	137	686	4000	3000	9.28x10 ⁻⁴	7.7	
	80	519	284	206	980					
	100	568	372	265	1080					
	120	617	451	294	1180					
45	50	502	265	176	950	4500	2500	13.8x10 ⁻⁴	10.1	
	80	706	395	315	1280					
	100	760	505	355	1580					
	120	822	622	405	1880					
	160	883	633	405	1890					
50	80	941	521	372	1860	4500	2500	57.2x10 ⁻⁴	14.5	
	100	982	656	471	2050					
	120	1090	815	533	2055					
		160	1190	843	534	2250				

Advantages

- High positioning and rotational accuracy
- High repeatability accuracy
- High torque
- Super compact design
- Backlash free
- Long service life
- High torsional stiffness
- High efficiency
- Simple installation
- Flexible for application design


Main Applications

- Robots
- High Precision Tooling Machine
- High Precision Testing Equipment
- Medical Equipment
- Optical Equipment
- Analytical and Testing Equipment
- Semiconductor Manufacturing Systems
- Packing Machines




Gear Dimensions

Box Unit KB-HO-14

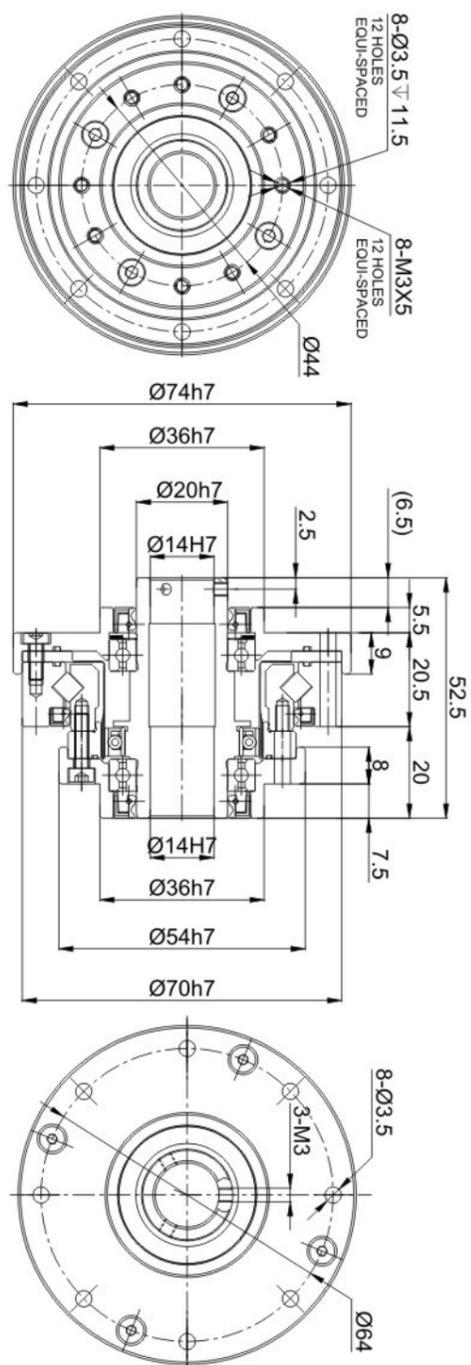


Box Unit KB-HO-17

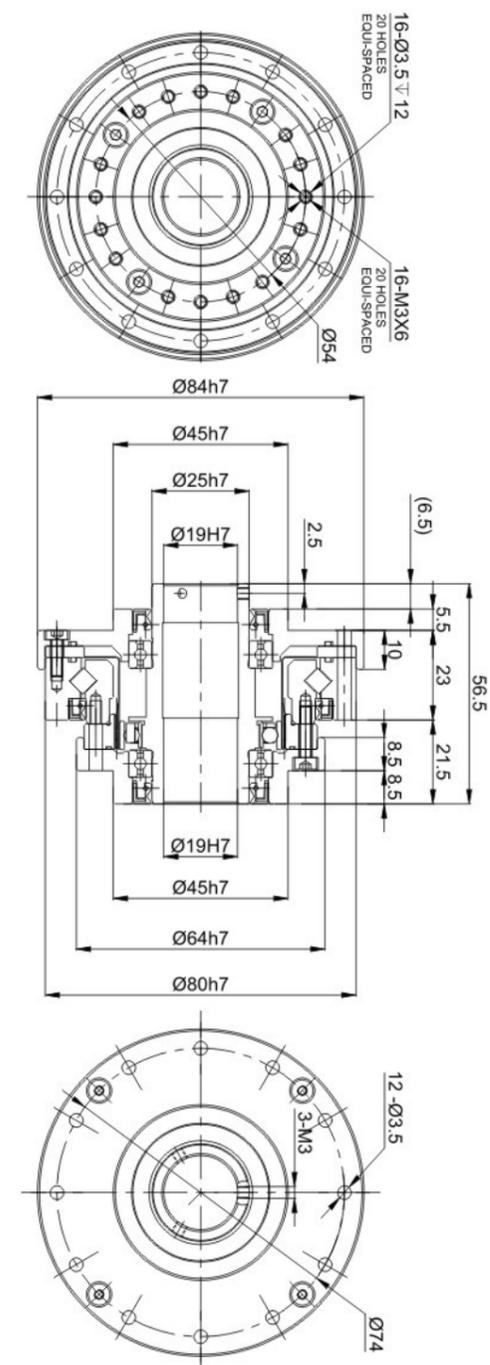




Gear Dimensions

Box Unit KB-HO-14

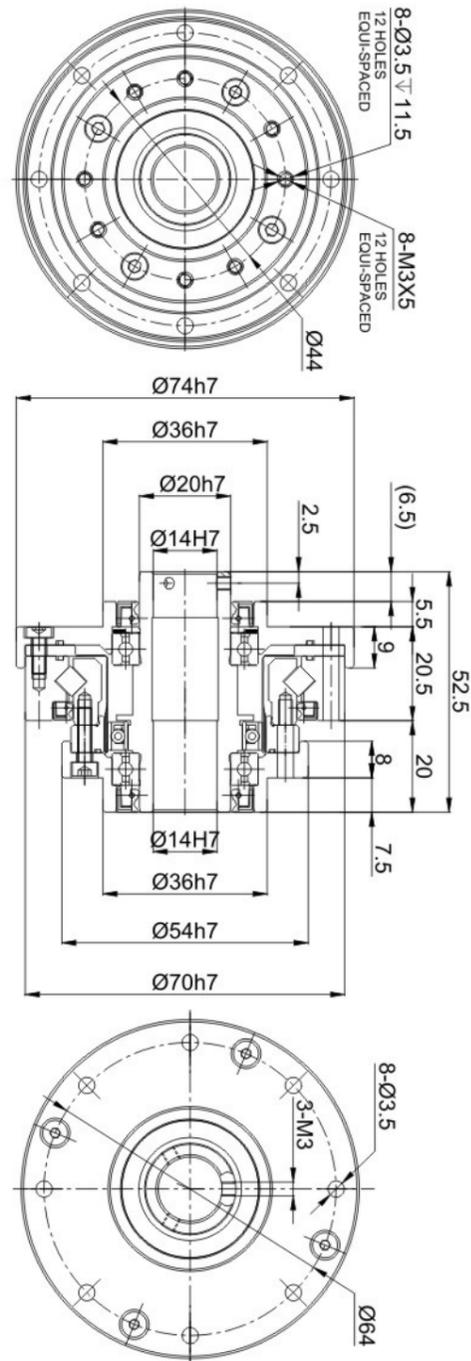


Box Unit KB-HO-17

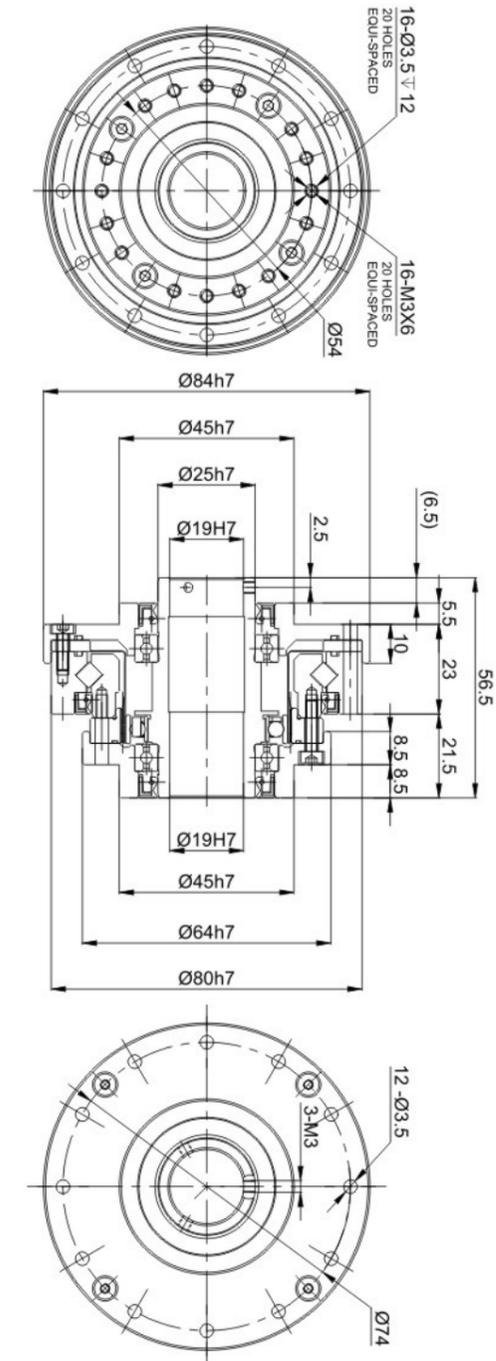




Gear Dimensions

Box Unit KB-HO-20

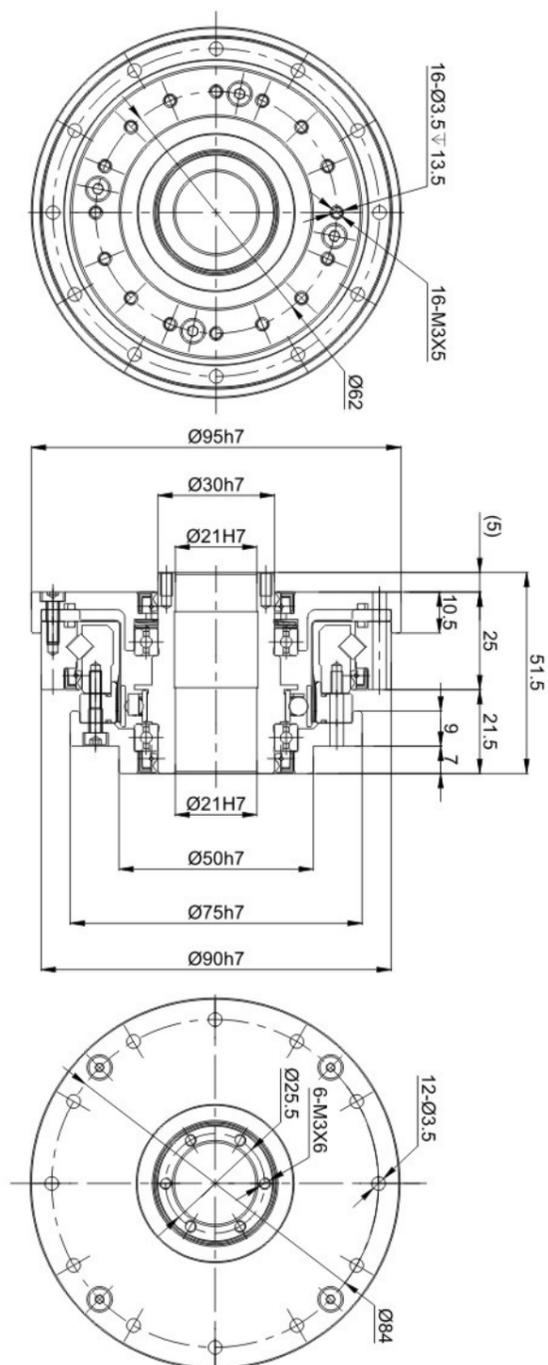


Box Unit KB-HO-25

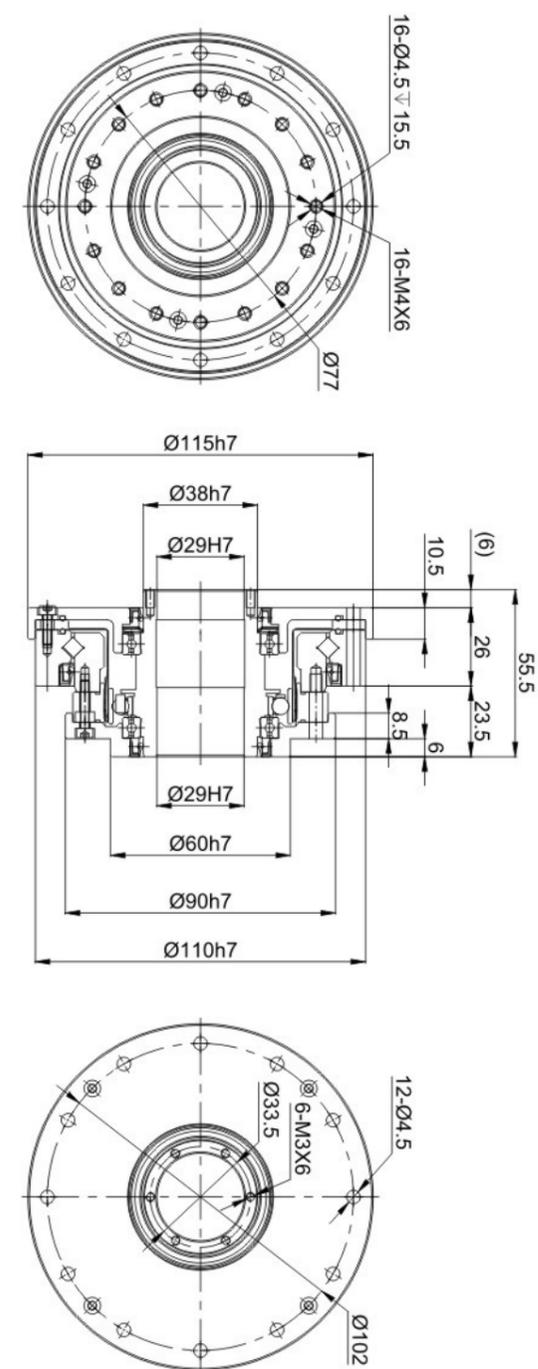




Gear Dimensions

Box Unit KB-HO-20

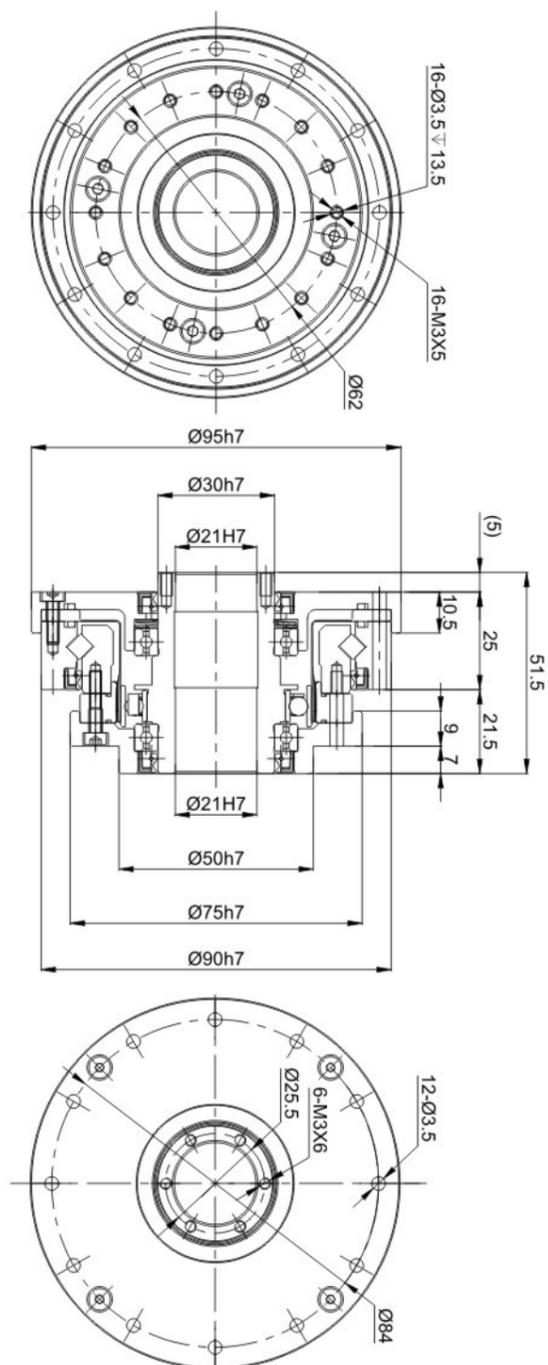


Box Unit KB-HO-25

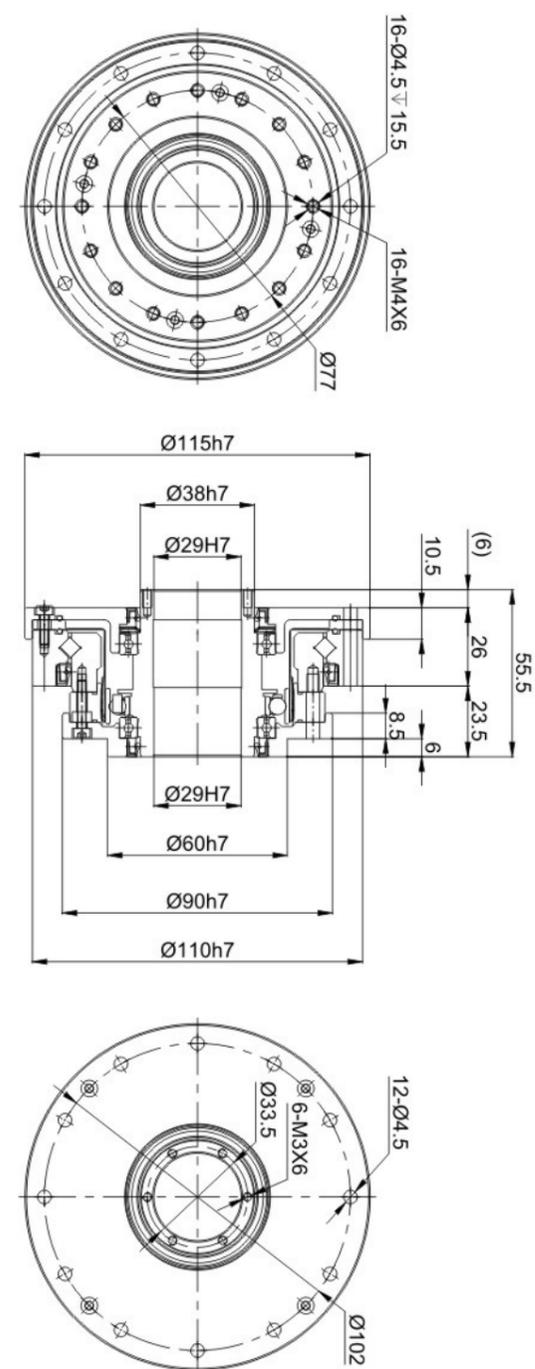




Gear Dimensions

Box Unit KB-HO-32

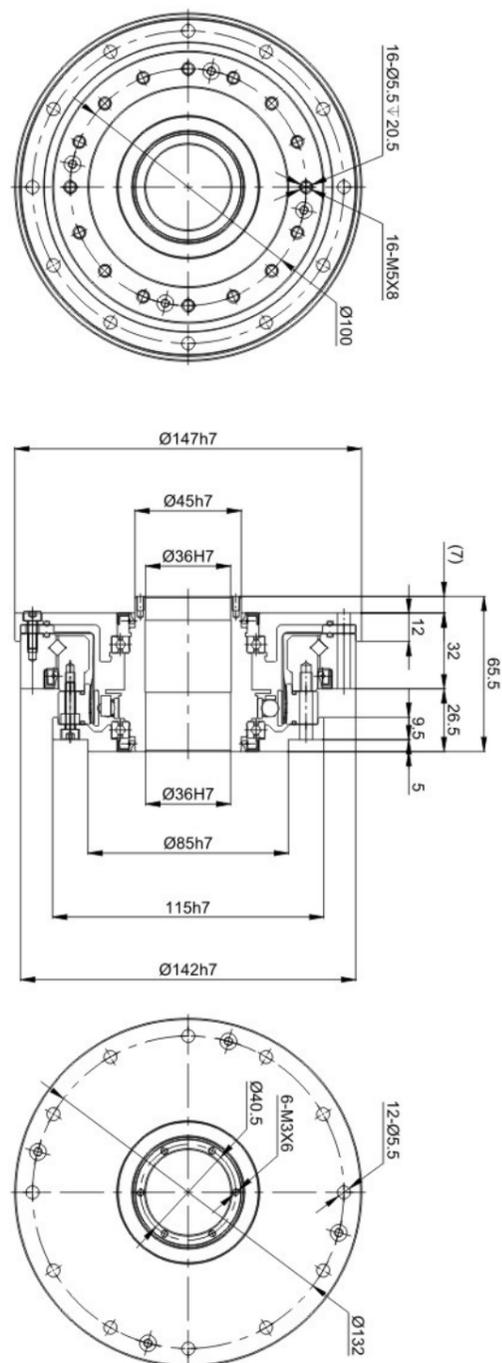


Box Unit KB-HO-40

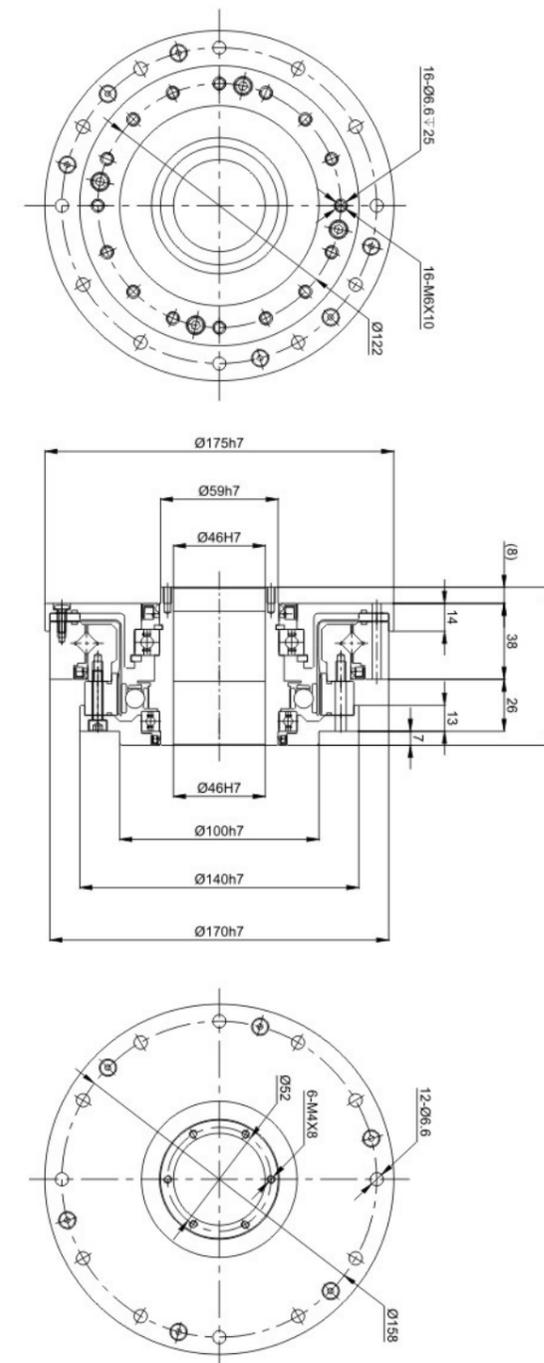




Gear Dimensions

Box Unit KB-HO-32

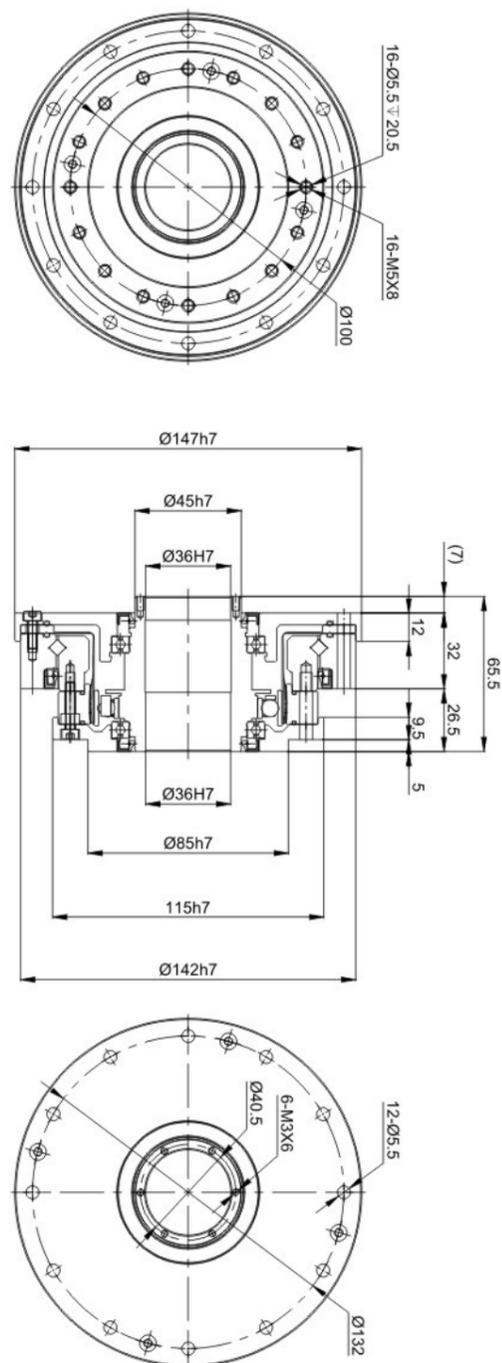


Box Unit KB-HO-40

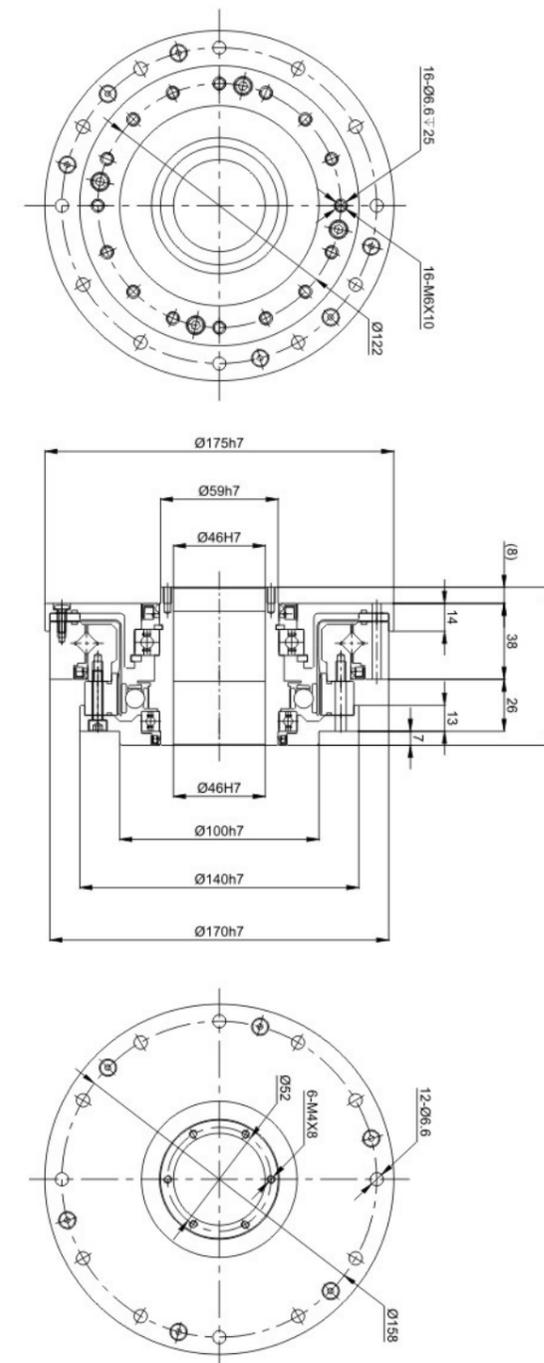




Gear Dimensions

Box Unit KB-HO-45

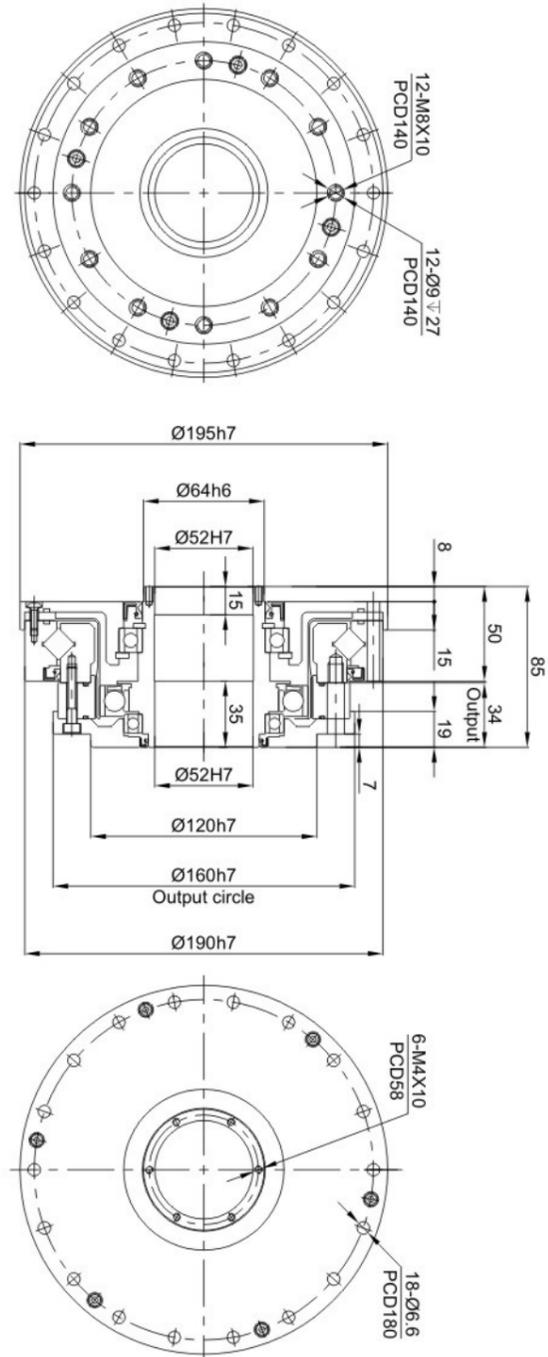


Box Unit KB-HO-50

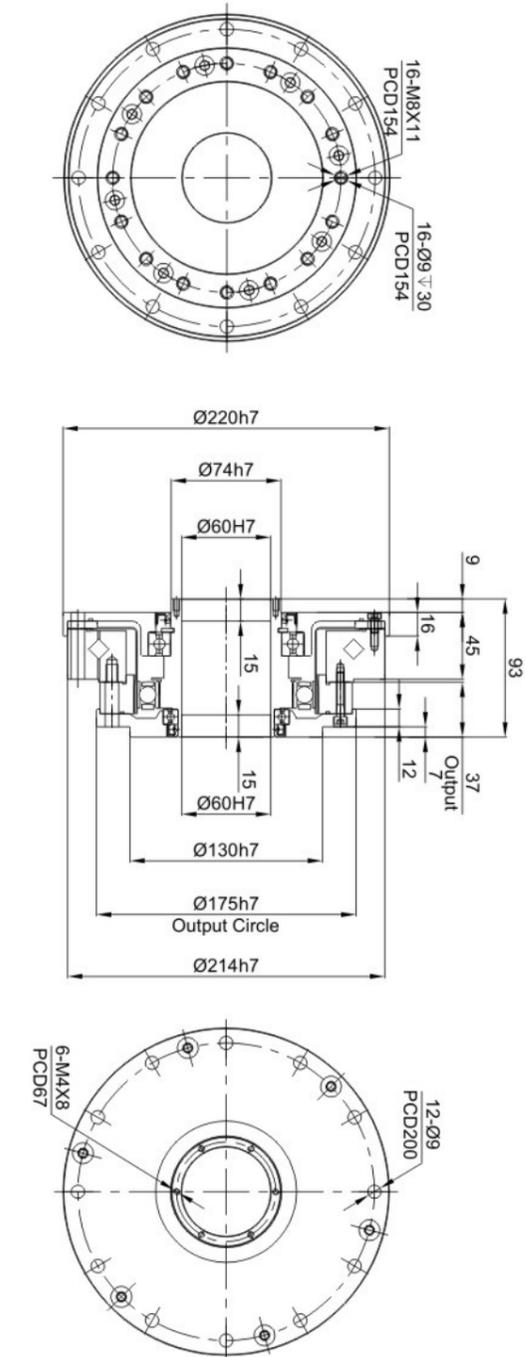



Gear Dimensions

Box Unit KB-HO-45

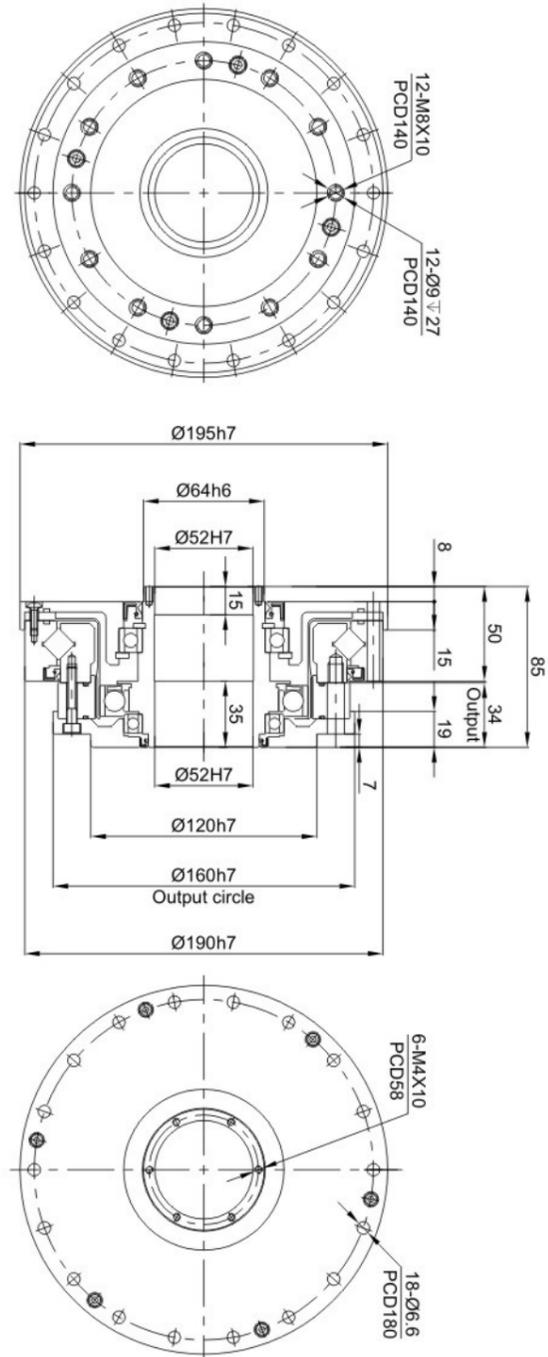

Box Unit KB-HO-50

